


# Fixed Attenuators

## Specifications

| Connector type        |    | SC, FC, LC, MU        |            |
|-----------------------|----|-----------------------|------------|
| Attenuation           | dB | 1 - 30                |            |
| Attenuation tolerance | dB | 1-5 ± 0.5             | 6-30 ± 10% |
| Wavelength operation  | nm | 1310 and 1550         |            |
| Thermal age           | dB | UPC = 55 and APC = 60 |            |
| Operating temperature | °C | -40 to 85             |            |

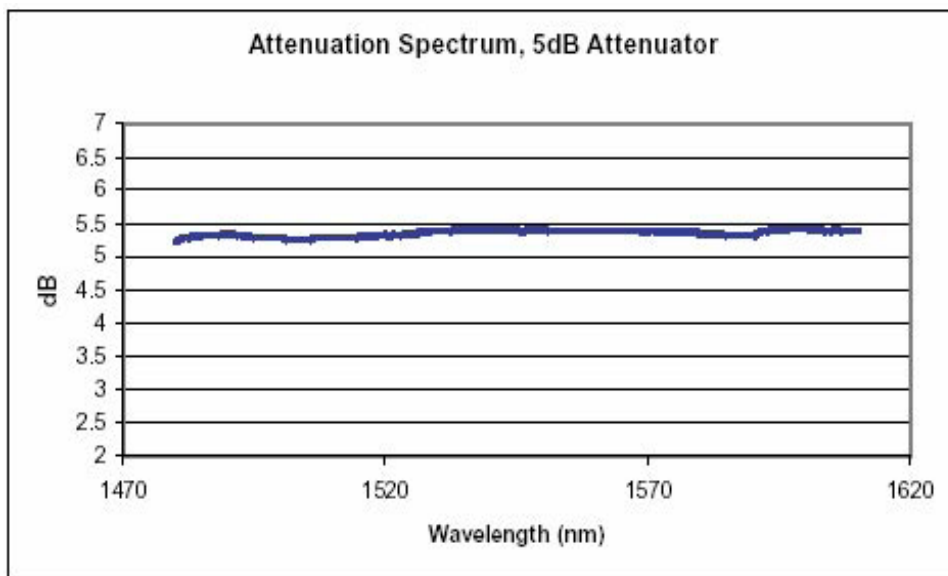

## Ordering Information

|        |               |          |
|--------|---------------|----------|
| SC     | S= Singlemode | 05= 5dB  |
| SC APC | M= Multimode  | 10= 10dB |
| FC     |               | 15= 15dB |
| FC APC |               | 20= 20dB |
| LC     |               | 25= 25dB |
| MU     |               |          |

Other versions available to special order