Type 43 Standard Density STD43 Straight Crimp Plug For BT2002 (75 Ohm)
Part Number : 316-102

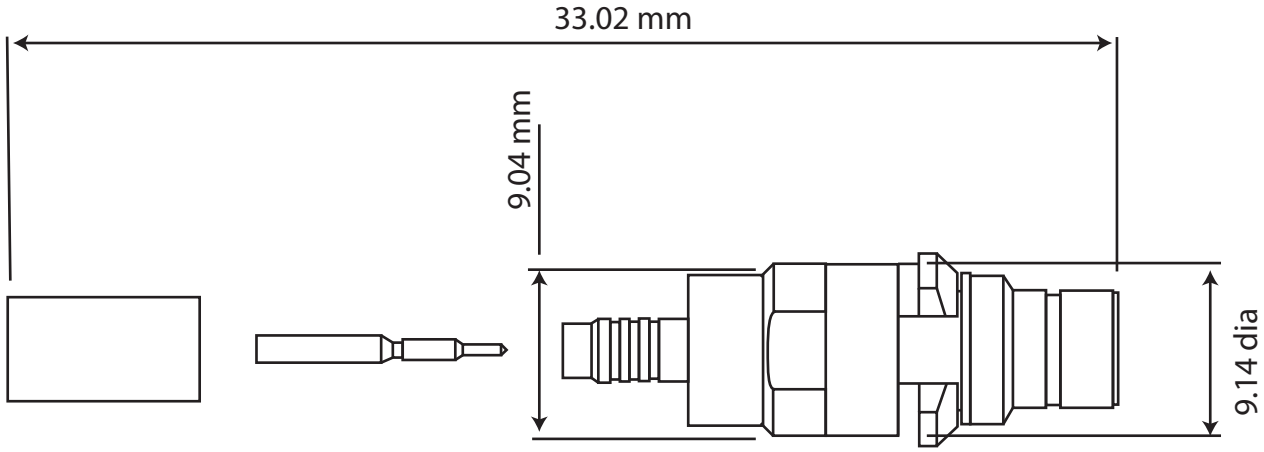

Electrical	
Impedance	75Ω nominal
Frequency Range	0 to 3.0
Working Voltage	500V
Proof Voltage	1500V
Insulation Resistance	5GΩ min
Center Contact Resistance	5.0m Ω max
Outer Contact Resistance	1.0mΩmax
Current Rating	1.5 A dc max
Materials	
Body Components	Copper or Zinc alloy
Center Contacts(Male/Female)	Copper alloy
Insulators	PTFE or Thermo set Plastics
Crimp Ferrules	Annealed Copper alloy
Finishing/Plating	
Center Contacts	Gold
Outer Contacts	Gold

Unit 10, The Dencora Centre, Campfield Road, St. Albans, Herts AL1 5HN, United Kingdom.
T 44 (0)1727 845750 | F 44 (0)1727 838780 | E info@gemcable.co.uk | W gemcable.co.uk