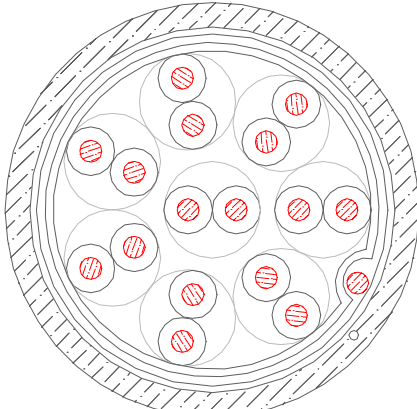


Product Code.: RD8422
Date: 2007-05-05
Cable Description .: 8 Pairs

<u>SPECIFICATION DESCRIPTION</u>	<u>ELECTRICAL DATA</u>																																										
1.) Conductor Tinned copper diameter : T0.50mm 2.)Dielectric Thickness : 0.30mm HDCPE diameter : 1.10 mm Color: According to the custome Each pair is twisted , Unshielded. 3.)Mylar Spiral Coverage>115% 4.)Drain Wire Tinned Copper : T0.50mm 5.)Al-Pet Shielded Coverage>115% 6.)Nylon rip cord Type :210D 7.)Sheath PVC Thickness : 0.85mm Diameter : 8.18+/-0.15mm Color: White 5.)Marking According to the customer 6.)Packaging 1000M/Wooden Drum According to the customer	Max.Conductor DC Resistance at 20℃Ω/Km$\times$ 95 Rated Temperature(℃) 80 Working Voltage(V) 150V DC,110V AC Min.Insulation DC Resistance at 20℃ΩMΩ*Km$\times$ 50 Impedance at 1-50MHz($\Omega$$\times$ 120+/-15 <table><tr><th colspan="4">Table 1</th></tr><tr><th rowspan="2">Pair NO:</th><th colspan="2">Color (Ring Marking)</th><th rowspan="2">Lay Length (mm)</th></tr><tr><th>A</th><th>B</th></tr><tr><td>1</td><td>WHT/BLU</td><td>BLU/WHT</td><td>62</td></tr><tr><td>2</td><td>WHT/ORG</td><td>ORG/WHT</td><td>65</td></tr><tr><td>3</td><td>WHT/GRN</td><td>GRN/WHT</td><td>68</td></tr><tr><td>4</td><td>WHT/BRN</td><td>BRN/WHT</td><td>72</td></tr><tr><td>5</td><td>WHT/GRY</td><td>GRY/WHT</td><td>75</td></tr><tr><td>6</td><td>RED/BLU</td><td>BLU/RED</td><td>79</td></tr><tr><td>7</td><td>RED/ORG</td><td>ORG/RED</td><td>83</td></tr><tr><td>8</td><td>RED/GRN</td><td>GRN/RED</td><td>87</td></tr></table>	Table 1				Pair NO:	Color (Ring Marking)		Lay Length (mm)	A	B	1	WHT/BLU	BLU/WHT	62	2	WHT/ORG	ORG/WHT	65	3	WHT/GRN	GRN/WHT	68	4	WHT/BRN	BRN/WHT	72	5	WHT/GRY	GRY/WHT	75	6	RED/BLU	BLU/RED	79	7	RED/ORG	ORG/RED	83	8	RED/GRN	GRN/RED	87
Table 1																																											
Pair NO:	Color (Ring Marking)		Lay Length (mm)																																								
	A	B																																									
1	WHT/BLU	BLU/WHT	62																																								
2	WHT/ORG	ORG/WHT	65																																								
3	WHT/GRN	GRN/WHT	68																																								
4	WHT/BRN	BRN/WHT	72																																								
5	WHT/GRY	GRY/WHT	75																																								
6	RED/BLU	BLU/RED	79																																								
7	RED/ORG	ORG/RED	83																																								
8	RED/GRN	GRN/RED	87																																								
Design: 	<u>OTHER</u> We operate according to the following standards RoHS GUIDELINE <table><tr><th>Control Item</th><th>Testing Equipment</th><th>Testing Method</th><th>Standard</th></tr><tr><td>Cadmium content (Cd)</td><td>ICP-AES</td><td>EN1122</td><td><0.01%</td></tr><tr><td>Lead content (Pb)</td><td>ICP-AES</td><td>EPA3050B</td><td><0.1%</td></tr><tr><td>Mercury content (Hg)</td><td>ICP-AES</td><td>EPA3052</td><td><0.1%</td></tr><tr><td>Chromium (VI) content</td><td>ICP-AES</td><td>EPA3060(UN-VIS)</td><td><0.1%</td></tr><tr><td>Polybrominated Biphenyls(PBB)</td><td></td><td>GC/MS</td><td>Forbidden</td></tr><tr><td>Polybrominated Diphenyl Ether (PBDE)</td><td></td><td>GC/MC</td><td>Forbidden</td></tr></table>	Control Item	Testing Equipment	Testing Method	Standard	Cadmium content (Cd)	ICP-AES	EN1122	<0.01%	Lead content (Pb)	ICP-AES	EPA3050B	<0.1%	Mercury content (Hg)	ICP-AES	EPA3052	<0.1%	Chromium (VI) content	ICP-AES	EPA3060(UN-VIS)	<0.1%	Polybrominated Biphenyls(PBB)		GC/MS	Forbidden	Polybrominated Diphenyl Ether (PBDE)		GC/MC	Forbidden														
Control Item	Testing Equipment	Testing Method	Standard																																								
Cadmium content (Cd)	ICP-AES	EN1122	<0.01%																																								
Lead content (Pb)	ICP-AES	EPA3050B	<0.1%																																								
Mercury content (Hg)	ICP-AES	EPA3052	<0.1%																																								
Chromium (VI) content	ICP-AES	EPA3060(UN-VIS)	<0.1%																																								
Polybrominated Biphenyls(PBB)		GC/MS	Forbidden																																								
Polybrominated Diphenyl Ether (PBDE)		GC/MC	Forbidden																																								