


SUB-D CONNECTORS – Solder Cup

Material Specification:


Insulator:	Glass filled Polyester, Black UL94 V-0
Shell:	Stamped Steel, Tin Plated
Contact pins:	Copper Alloy
Stamped & Formed Pins	Class 3, 100 inserts min. (DB)
Machined Pins:	Class 1, 500 inserts min. (DM)
Contact Plating:	Selective Gold over Nickel



Plug connector

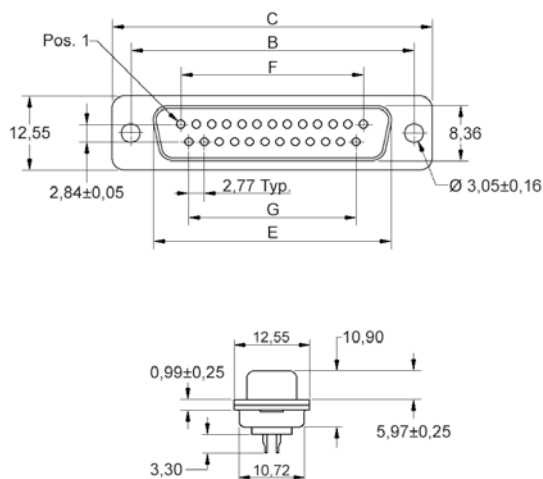

Socket connector

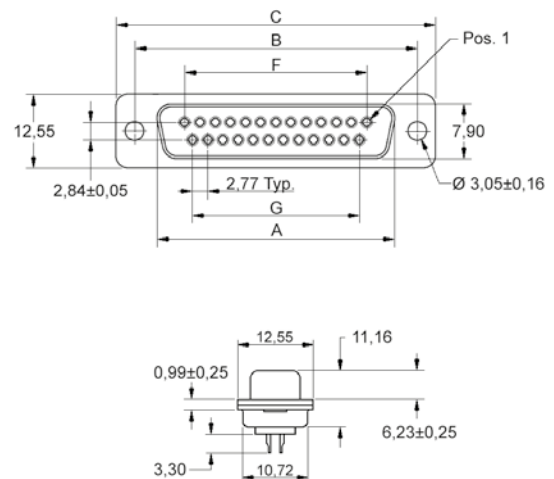

Size	A	B	C	E	F	G
9	16,33	24,99	30,81	16,92	11,08	8,31
15	24,66	33,32	39,14	25,25	19,39	16,62
25	38,38	47,04	53,04	38,96	33,24	30,47
37	54,84	63,50	69,32	55,25	49,86	47,09

Order Codes:

Plug Connector

09	650-006
15	650-007
25	650-008
37	650-009
50	650-010

Socket Connector

09	650-001
15	650-002
25	650-003
37	650-004
50	650-005