


## Mini RG59 White Coaxial Cable

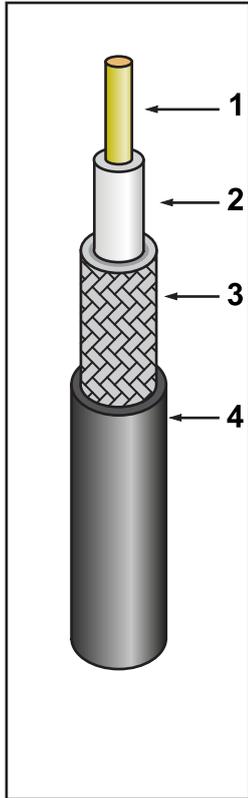

Construction Specifications		
1 Inner Conductor	Copper Clad Steel	0.64 mm
2 Dielectric	Foam PE	2.9 mm
3 Overall Braid	Bare Copper	85 %
4 Jacket	PVC (white)	4.15 mm

Electrical Specifications	
1 Impedance	75 ± 2 W
2 Capacitance	54
3 Velocity of Propagation	84%

Environmental Specifications	
1 Temperature range	-30°C to +70°C
2 Maximum frequency	1 GHz
3 Weight	30 kg/km



Frequency (MHz)	10	200	400	1000	2400
Attenuation at 20C (-dB/100m) (±8%)	4	14	20	33	51

Connectors*				
				
N Type Crimp Plug	TNC Crimp Plug	SMA Crimp Plug	N Type Clamp Plug	N Type Clamp Socket

\*Only A Selection of Connectors Shown, More Available From Stock

**We Manufacture Your  
Cable Assemblies  
To Your Spec**

