


RG58 White Coaxial Cable

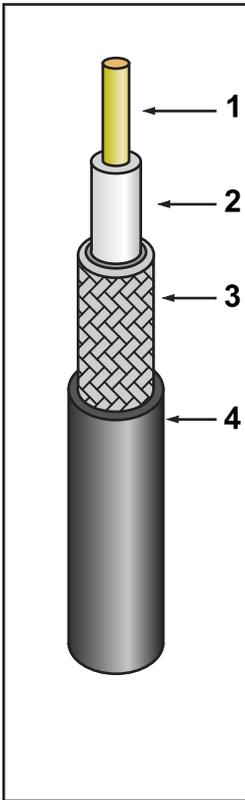

Construction Specifications		
1 Inner Conductor	Tinned copper	0.90 mm
2 Dielectric	Solid PE	2.95 mm
3 Overall Braid	Tinned copper	94%
4 Jacket	PVC (White)	4.95 mm

Electrical Specifications	
1 Impedance	50 ± 3
2 Capacitance	100 ± 5
3 Velocity of Propagation	66%

Environmental Specifications	
1 Rated Temperature(°C)	80
2 Rated Voltage(V)	1 GHz
3 Weight	46 Kg/Km



Frequency (MHz)	100	200	1000
Attenuation at 20C (-dB/100m) (±8%)	21.00	31.00	76.00

Connectors*				
				
N Type Crimp Plug	TNC Crimp Plug	SMA Crimp Plug	N Type Clamp Plug	N Type Clamp Socket

*Only A Selection of Connectors Shown, More Available From Stock

**We Manufacture Your
Cable Assemblies
To Your Spec**

