




DATE	REV.	ECN	APP'D BY
6-29-06	A0	-	-
9-18-06	A1	7758	TRM
12-1-06	B0	7851	TRM

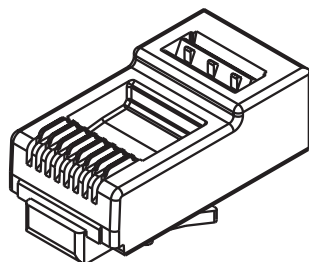



PLUG HOUSING
SCALE 2.5



PLUG BODY



CONTACTS (8)

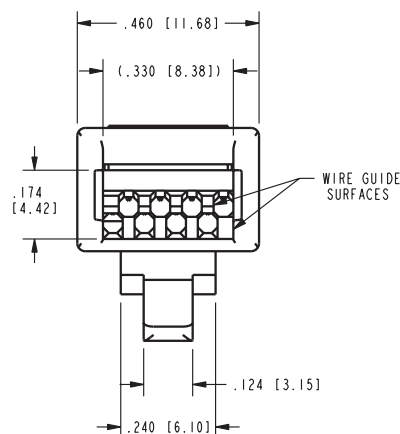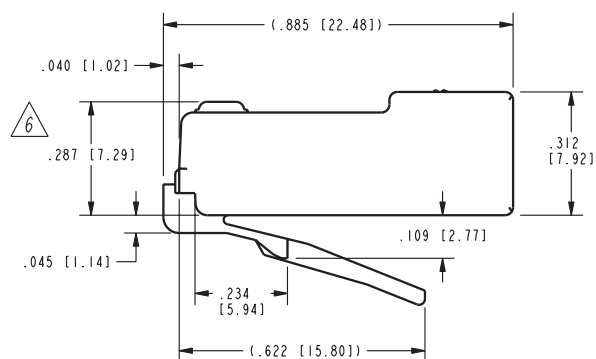


WIRE GUIDE SURFACES

NOTES:

- PART CONSISTS OF:
PRE-INSERTED PLUG BODY
- MATERIALS:
FRONT HOUSING PLASTIC : CLEAR POLYCARBONATE, UL 94-V0
CONTACTS : PHOSPHOR BRONZE, SELECTIVE GOLD PLATING
- CONTACTS TERMINATE SOLID OR STRANDED CONDUCTORS BETWEEN .042 [1.07] TO .048 [1.22] OUTSIDE DIAMETER OF INSULATION
- DESIGNED FOR CATEGORY 5/5e APPLICATIONS.
- DIMENSIONS AND TOLERANCES COMPLY WITH FCC/CFR 47, PART 68.

6 TERMINATED PLUG HEIGHT: .237 [6.02] ± .005 [0.13]

7. FOR PRODUCT SPECIFICATION SEE PRO26-01.

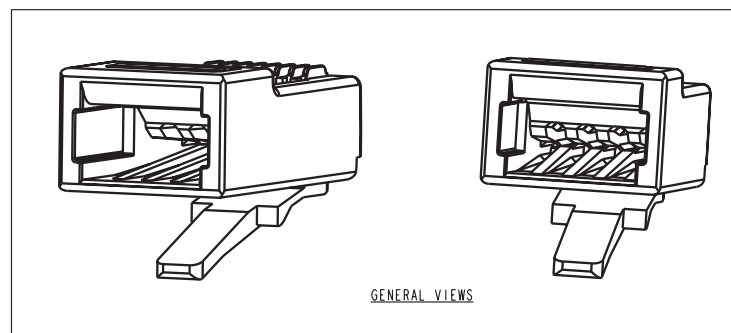

GENERAL VIEWS



THIRD ANGLE PROJECTION



DO NOT SCALE DRAWING

DRAWING IS SUBJECT TO
CHANGE WITHOUT NOTICE

DIMENSIONS: INCHES (METRIC)

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE ± .005 [0.13]
ANGLES ARE ± 1°

SHEET NO.
1 OF 1



www.gemcable.co.uk

TITLE: UNSHIELDED CAT 5E PLUG

DRN BY:	TRM	DATE	6-29-06
APPD BY:	DHG	DATE	6-29-06
DWG. NO.	CT370059	REV.	B0