SMA bulkhead crimp socket for RG58 URM43 LMR195 GBC195(8mm Hex. Flange)

Part number: 311-218

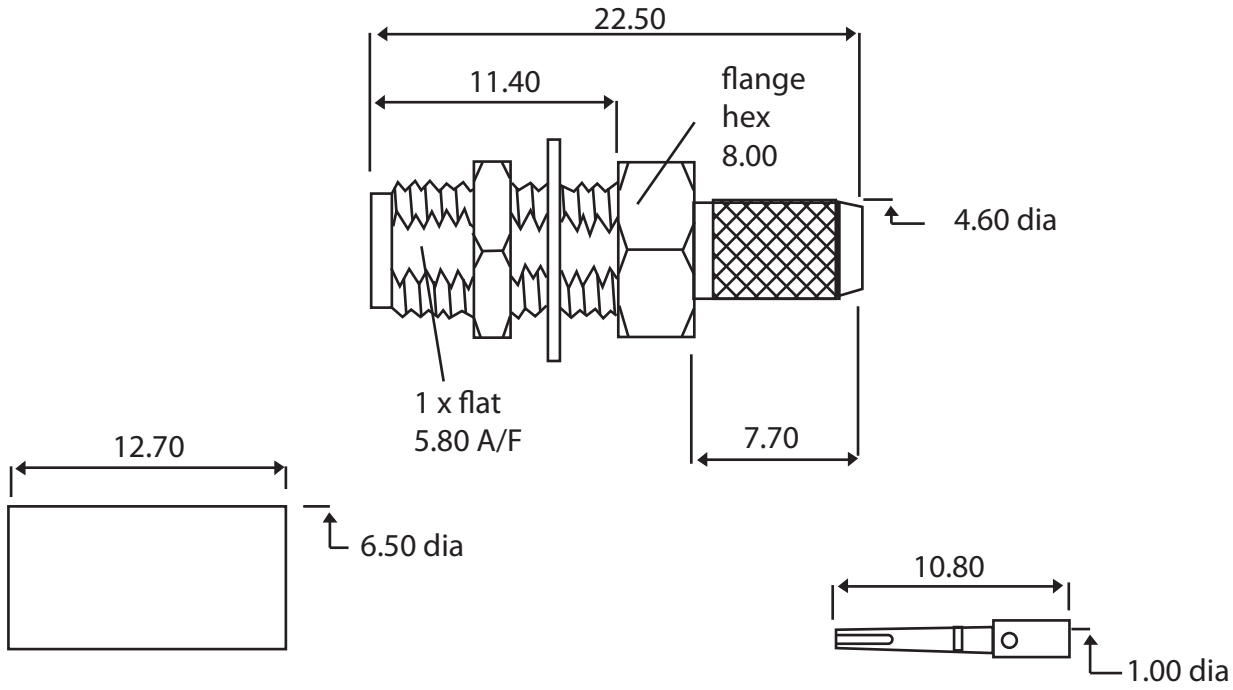

Description	**SMA Crimp Bulkhead Jack, Gold Plated**
To Fit Cable Types	RG58, LBC195, LBC195 ExtraFlex, URM43
Fixing Method	Crimp
Body	Brass, Gold Plated
Contact	Beryllium Copper, Gold Plated
Dielectric	PTFE
Ferrule	Brass, Gold Plated
Locknut	Brass, Gold Plated
Washer	SS41, Gold Plated
Cable Retention	Equal to breaking strain of cable
Dielectric Withstanding	1000 Volts RMS Maximum
Durability	500 mating cycles
Impedance	50 ohms
Max. Frequency	12.4 GHz
Temperature Range	-65 to +165 degrees C
Working Voltage	500 Volts RMS Maximum
Maximum Panel Thickness	3.20 mm

Unit 10, The Dencora Centre, Campfield Road, St. Albans, Herts AL1 5HN, United Kingdom.

T 44 (0)1727 845750 | F 44 (0)1727 838780 | E info@gemcable.co.uk | W gemcable.co.uk