
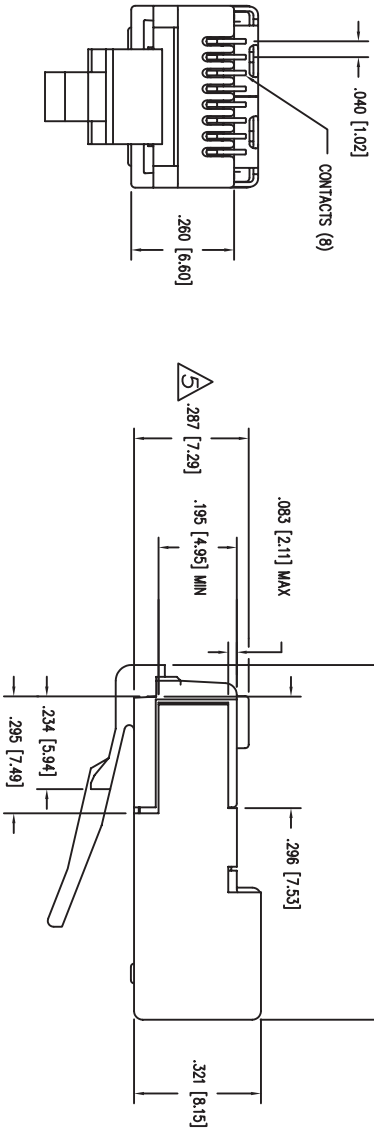
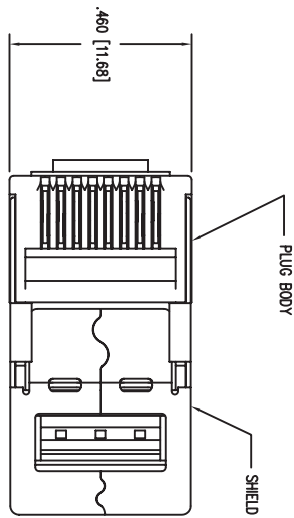


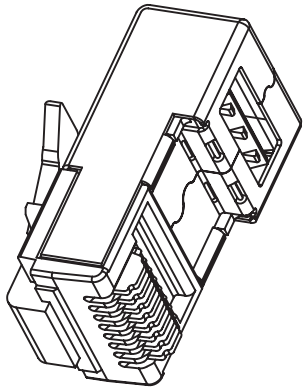

DATE	REV	ECN	APP'D. BY
4-2-04	A0	-	-
10-31-05	A1	7362	TRM
1-16-06	A2	7436	JM

NOTES:

- CONNECTOR MATERIALS:
FRONT HOUSING PLASTIC: CLEAR POLYCARBONATE, UL 94-V0
PLUG SHIELD: TIN PLATED BRASS
CONTACTS: COPPER ALLOY SELECTIVE GOLD PLATED
- CONTACTS TERMINATE SOLID OR STRANDED CONDUCTORS BETWEEN .037 [0.94] TO .042 [1.07] OUTSIDE DIAMETER OF INSULATION.
- FOR PRODUCT SPECIFICATION SEE PRO26-01.
- TOLERANCE COMPLY WITH F.C.C. DIMENSION REQUIREMENTS.

5 TERMINATED PLUG HEIGHT: .237 [6.02] ±.005 [0.13]

BAG OF 25	50 MICRO-INCHES [1.27um]	SS-37200-032
BULK	50 MICRO-INCHES [1.27um]	SS-37200-028
PACKAGE	CONTACT PLATING IN MATING AREA	PART NUMBER

THIRD ANGLE PROJECTION



GEM
CABLE SOLUTIONS
www.gemcable.co.uk

TITLE: CAT 56 MODULAR PLUG SHIELDED

DO NOT SCALE DRAWING DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE	DRN BY: JMB	DATE: 4-2-04
DIMENSIONS: INCHES [METRIC]	APP'D BY: RGC	DATE: 4-16-04
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ±.005 [0.13] ANGLES ARE ± 1°	DWG NO. CT370055	REV. A2
SHEET NO. 1 OF 1		

