

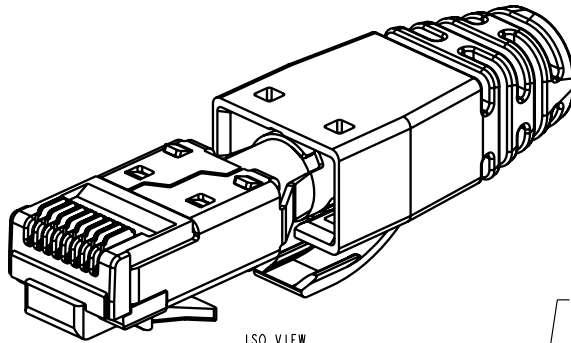
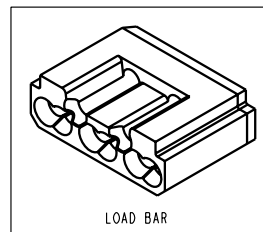
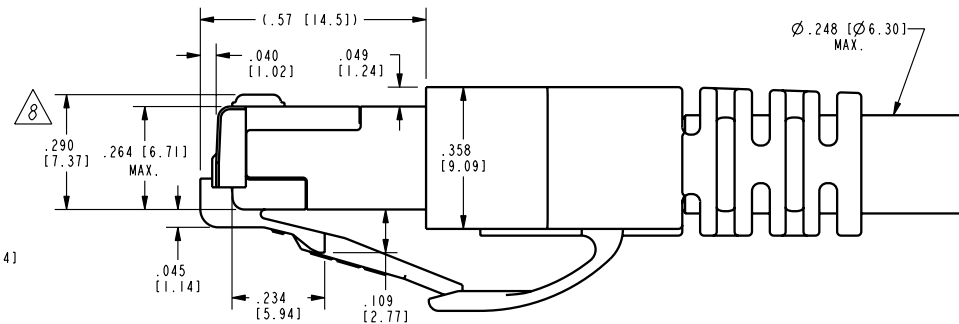


DATE	REV.	ECN	APP'D BY
4-25-06	B4	7598	TRM
7-10-09	B5	8779	TRM

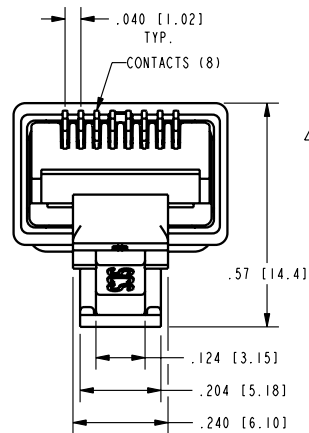

ISO VIEW

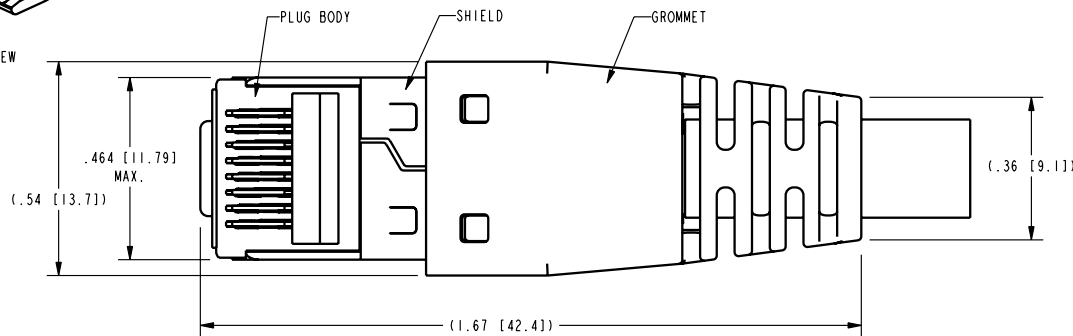


LOAD BAR



NOTES:

1. PLUG KIT CONSISTS OF:
PRE-INSERTED PLUG BODY WITH SHIELD
LOAD BAR
GROMMET
2. MATERIALS:
PLUG BODY: CLEAR POLYCARBONATE, UL 94-V0
LOAD BAR: BLACK POLYCARBONATE, UL 94-V0
GROMMET: BLACK POLYCARBONATE, UL 94-V0
CONTACTS: COPPER ALLOY, SELECTIVE GOLD PLATING
SHIELD: COPPER ALLOY, NICKEL PLATE
3. FOR PRODUCT SPECIFICATION SEE PR026-01.
4. CONTACTS TERMINATE SOLID OR STRANDED CONDUCTORS BETWEEN .037 [0.94] TO .042 [1.07] OUTSIDE DIAMETER OF INSULATION.
5. CRIMP IS FOR CABLES WITH OUTSIDE NOMINAL DIAMETERS OF .232 [5.90] TO .248 [6.30].
6. PRODUCT DESIGNED FOR CATEGORY 6 APPLICATIONS.
7. TOLERANCES COMPLY WITH F.C.C. DIMENSION REQUIREMENTS.
8. TERMINATED PLUG HEIGHT: .237 [6.02] $\pm$.005 [0.13].

THIRD ANGLE PROJECTION



DO NOT SCALE DRAWING

DRAWING IS SUBJECT TO
CHANGE WITHOUT NOTICE

DIMENSIONS: INCHES (METRIC)

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE $\pm$.005 [0.13]
ANGLES ARE $\pm$ 1°SHEET NO.
1 OF 1

www.gemcable.co.uk

TITLE:
8 CONDUCTOR, 8 POSITION SHIELDED CAT6/6A PLUG
WITH LOAD BAR, CRIMP STYLE AND GROMMET

DRN BY:	TRM	DATE	1-20-05
APPD BY:	DHG	DATE	1-21-05
DWG. NO.	CT390037	REV.	B5