


N Type Bulkhead Crimp Socket for RD316

Part number 308-108

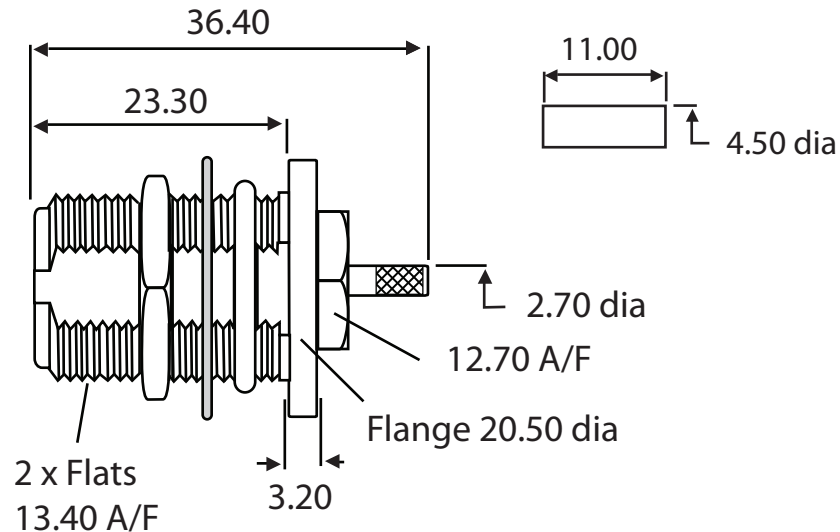

To Fit Cable Types	RD316
Fixing Method	Crimp
Body	Brass, Nickel Plated
Contact	Brass, Gold Plated
Dielectric	PTFE
Ferrule	Brass, Nickel Plated
Locknut	Brass, Nickel Plated
Cable Retention	Equal to breaking strain of cable
Dielectric Withstanding	2500 Volts RMS Maximum
Durability	500 mating cycles
Impedance	50 ohms
Max. Frequency	3 GHz
Temperature Range	-65 to +165 degrees C
Working Voltage	1500 Volts RMS Maximum
Maximum Panel Thickness	7.50 mm