


RG213 Coax Cable

ITEM		A.Q.L	Description
Conductor	No./mm	0.75 (+/- 0.02)	Stranded Bare Copper Wire
	T0.75mm x 7		
Insulation	No./mm	7.25 (+/- 0.30)	Solid PE Insulation
	7.25 SPE		
Shield	No./mm	192 (+/-2) 0.18 (+/- 0.01)	Bare Copper Wire Braid
	0.18 mm x 192		
Jacket	No./mm	10.30 (+/- 0.30)	Black PVC Jacket
	10.30 PVC		

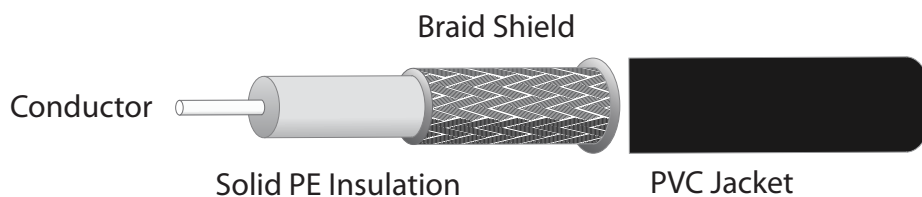

Item	Description		Standards
1. Inner Cond. Res.	20°C, Conductor DC Resistance		< 6.30 Ω/Km
2. Braid Coverage			98 ± 2 %
3. Capacitance			100 ± 8 pF/m
4. Velocity Ratio			66.6 ± 3 %
5. Impedance	10 MHz		50 ± 3 Ω
6. Attenuation	20°C -dB/100M (+/- 15 %)	100 MHz	6.9
		200 MHz	9.8
		400 MHz	14.8
		700 MHz	21.3
		1000 MHz	26.9
7. RoHS	With Ref To RoHS Dir 2002/95/EC		PASS