


## RG59 B/U Duct Coaxial Cable

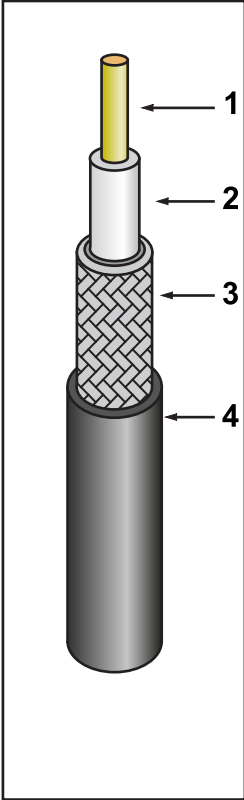

Construction Specifications		
1 Inner Conductor	Copper Clad Steel	0.58mm
2 Dielectric	Solid PE	3.70mm
3 Overall Braid	Bare Copper	86%
4 Jacket	POLYETHYLENE	6.10mm

Electrical Specifications	
1 Impedance	75
2 Capacitance	67
3 Velocity of Propagation	66%

Environmental Specifications	
1 Rated Temperature(C)	-20 to +80
2 Rated Voltage(V)	30
3 Weight	60 Kg/Km



Frequency (MHz)	50	100	200	400	800	1000
Attenuation at 20C (-dB/100m) ( $\pm 8\%$ )	7.70	11.00	15.90	23.10	34.20	38.90

Connectors*				
				
N Type Crimp Plug	TNC Crimp Plug	SMA Crimp Plug	N Type Clamp Plug	N Type Clamp Socket

\*Only A Selection of Connectors Shown, More Available From Stock

**We Manufacture Your  
Cable Assemblies  
To Your Spec**

