


RG179 LSHF Coaxial Cable

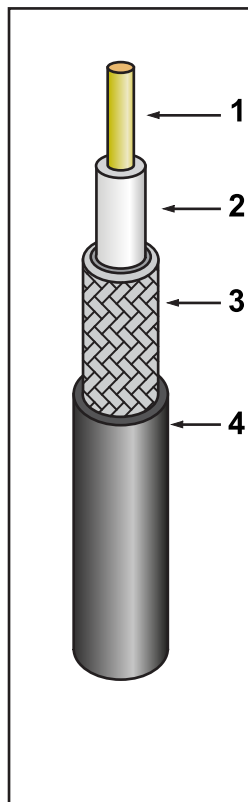

Construction Specifications		
1 Inner Conductor	Tinned copper	0.36mm
2 Dielectric	Foam - Skin	1.60mm
3 Overall Braid	SPCCS	95%
4 Jacket	LSZH	2.60 mm

Electrical Specifications	
1 Impedance	75 ± 3
2 Capacitance	54 ± 5
3 Velocity of Propagation	80%

Environmental Specifications	
1 Rated Temperature(°C)	80
2 Rated Voltage(V)	30
3 Weight	12 Kg/Km



Frequency (MHz)	10	100	200
Attenuation at 20C (-dB/100m) (±8%)	6.00	19.50	28.00

Connectors*				
				
N Type Crimp Plug	TNC Crimp Plug	SMA Crimp Plug	N Type Clamp Plug	N Type Clamp Socket

*Only A Selection of Connectors Shown, More Available From Stock

**We Manufacture Your
Cable Assemblies
To Your Spec**



Although GEM Cable Solutions makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described herein are subject to error or omission and to change without notice, and the listing of such information and specifications does not ensure product availability.

Unit 10, The Dencora Centre, Campfield Road, St. Albans, Herts AL1 5HN, UK