


RG179 Stranded LSHF Coax Cable

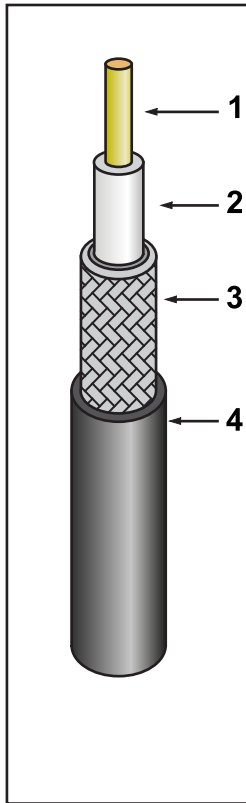

Construction Specifications		
1 Inner Conductor	Silver plated, copper clad steel	7/0.102
2 Dielectric	PTFE	1.60
3 Overall Braid	Silver plated copper	
4 Jacket	LSHF	2.54

Electrical Specifications	
1 Impedance	75
2 Capacitance	64 pF/m
3 Velocity of Propagation	69.5%

Environmental Specifications	
1 Temperature range	-70°C to +200°C
2 Max current	0.5A
3 Weight	12 Kg/Km



Frequency (MHz)	400	700	900	1000
Attenuation at 20C (-dB/100m) (±8%)	52.5	64.6	73.2	78.7

Connectors*				
				
N Type Crimp Plug	TNC Crimp Plug	SMA Crimp Plug	N Type Clamp Plug	N Type Clamp Socket

*Only A Selection of Connectors Shown, More Available From Stock

**We Manufacture Your
Cable Assemblies
To Your Spec**

