


## RG213 /U LSHF Coax Cable

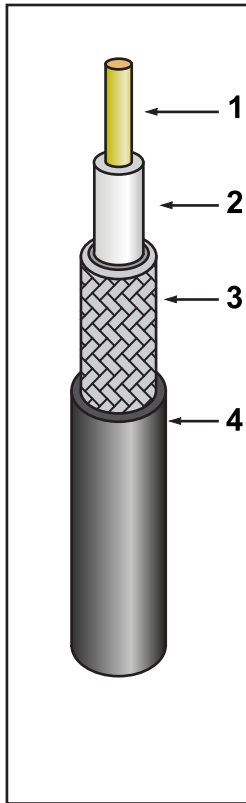

Construction Specifications		
1 Inner Conductor	stranded soft annealed copper	2.25 mm
2 Dielectric	Solid PE	7.25 mm
3 Overall Braid	Annealed copper	92 %
4 Jacket	LSHF	10.3 mm

Electrical Specifications	
1 Impedance	50 ± 2 W
2 Capacitance	100 pF/m ± 3 pF/m
3 Velocity of Propagation	0.66 %

Environmental Specifications	
1 Storage/operating temperature	-25°C to +70°C
2 Minimum static bend radius	50 mm
3 Weight	166 Kg/Km



Frequency (MHz)	100	400	800	1000	1750	2400
Attenuation at 20C (-dB/100m) (±8%)	19	14	21	24	34	42

Connectors*				
				
N Type Crimp Plug	TNC Crimp Plug	SMA Crimp Plug	N Type Clamp Plug	N Type Clamp Socket

\*Only A Selection of Connectors Shown, More Available From Stock

**We Manufacture Your  
Cable Assemblies  
To Your Spec**



Although GEM Cable Solutions makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described herein are subject to error or omission and to change without notice, and the listing of such information and specifications does not ensure product availability.