


RG 218 coax cable

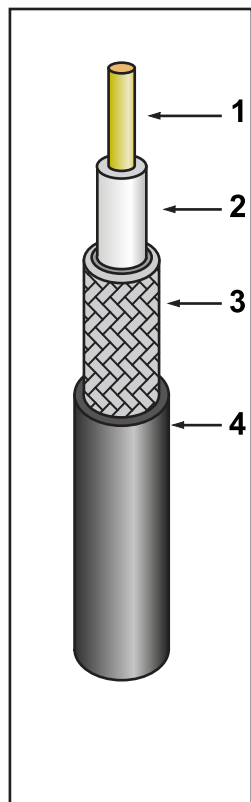

Construction Specifications		
1 Inner Conductor	Bare Copper	4.95
2 Dielectric	Solid Low Density Polyethylene	17.3
3 Overall Braid	Bare Copper Shield	
4 Jacket	PVC	22.0

Electrical Specifications	
1 Impedance	50
2 Capacitance (pF/m)	30.8
3 Velocity of propagation(%)	65.9

Environmental Specifications	
1 Max operating voltage(RMS)	11,000
2 Operating temp range(°C)	-40°C to +80°C
3 Cable weight (approx.)	0.78 Kg/m



Frequency (MHz)	10	50	100	200	400	1000	3000
Attenuation (-dB/100m)	0.757	1.807	2.677	4.028	6.181	11.293	24.802

Connectors*				
				
N Type Crimp Plug	TNC Crimp Plug	SMA Crimp Plug	N Type Clamp Plug	N Type Clamp Socket

*Only A Selection of Connectors Shown, More Available From Stock

**We Manufacture Your
Cable Assemblies
To Your Spec**

