


RG304 Coax Cable

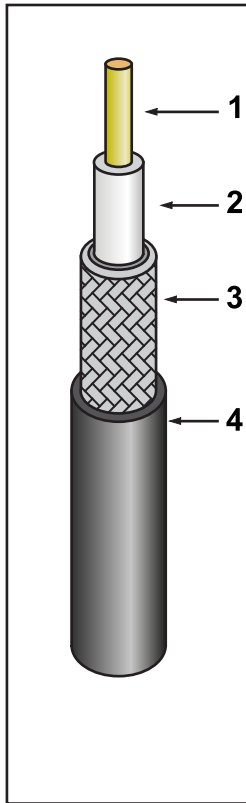

Construction Specifications		
1 Inner Conductor	Silver plated copper covered steel	1.50 mm
2 Dielectric	Solid PTFE	4.75 mm
3 Overall Braid	Silver Covered Copper	95%
4 Jacket	FEP	7.10 mm

Electrical Specifications	
1 Impedance (Ohm)	50
2 Capacitance(pF/m)	96.5
3 Velocity of propagation	70%

Environmental Specifications	
1 Temperature Range	-55 °C to +200 °C
2 Test/Operating Voltage(max)	5.0 KV/3.0 KV
3 Weight	130 Kg/Km



Frequency (MHz)	100	200	400	700	1000	3000	5000	8000
Attenuation (-dB/100)	8.5	13.5	18	24.9	30.2	56.8	77.1	114.8

Connectors*				
				
N Type Crimp Plug	TNC Crimp Plug	SMA Crimp Plug	N Type Clamp Plug	N Type Clamp Socket

*Only A Selection of Connectors Shown, More Available From Stock

**We Manufacture Your
Cable Assemblies
To Your Spec**



Although GEM Cable Solutions makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described herein are subject to error or omission and to change without notice, and the listing of such information and specifications does not ensure product availability.