


BT3002 Black Coax Cable

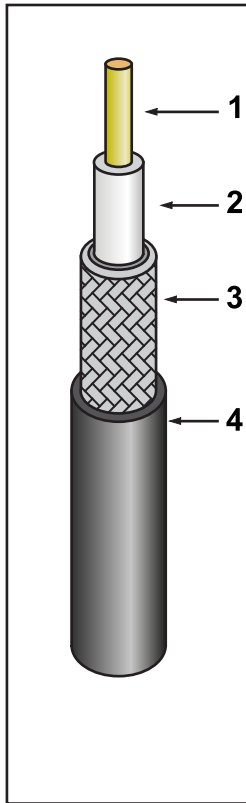

| Construction Specifications | | |
|-----------------------------|-----------------------------|--------|
| 1 Inner Conductor | Bare Copper | 0.31mm |
| 2 Dielectric | PE | 1.95mm |
| 3 Overall Braid | Tinned Annealed Copper Wire | 95% |
| 4 Jacket | PVC | 3.55mm |

| Electrical Specifications | |
|---------------------------|-------|
| 1 Impedance (Ohm) | 75 |
| 2 Capacitance(pF/m) | 70 |
| 3 Velocity of propagation | 66.6% |
| | |
| | |

| Environmental Specifications | |
|------------------------------|---------|
| 1 Rated Temperature (°C) | 80 |
| 2 Rated Voltage (V) | 30 |
| 3 Weight | 24Kg/Km |



| Frequency (MHz) | 1 | 4 | 17 | 69 | 78 |
|-----------------------|---|---|----|----|----|
| Attenuation (-dB/100) | | | | | |

| Connectors* | | | | |
|---|---|---|--|---|
|  |  |  |  |  |
| N Type Crimp Plug | TNC Crimp Plug | SMA Crimp Plug | N Type Clamp Plug | N Type Clamp Socket |

*Only A Selection of Connectors Shown, More Available From Stock

**We Manufacture Your
Cable Assemblies
To Your Spec**

