


## TZC 75024 Coax Cable

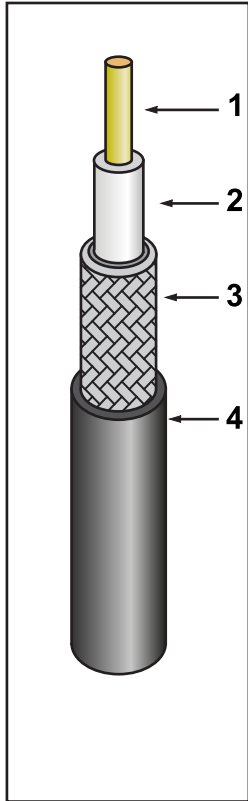

Construction Specifications		
1 Inner Conductor	Solid Bare Copper	0.31 mm
2 Dielectric	PE	1.97 mm
3 Overall Braid	Tinned Copper braid shield	
4 Jacket	PVC	3.55mm

Electrical Specifications	
1 Impedance (+/-3 Ω)	75
2 Capacitance (pF/m)	67
3 Velocity of propagation (%)	80

Environmental Specifications	
1 Temperature Rating (°C)	60
2 Weight	50 Kg/Km



Frequency (MHz)	1	4	10	50	70
Attenuation (-dB/100m)	2.30	4.70	7.50	15.80	18.70

Connectors*				
				
N Type Crimp Plug	TNC Crimp Plug	SMA Crimp Plug	N Type Clamp Plug	N Type Clamp Socket

\*Only A Selection of Connectors Shown, More Available From Stock

**We Manufacture Your  
Cable Assemblies  
To Your Spec**

