


RA7000 4 core Coax Cable

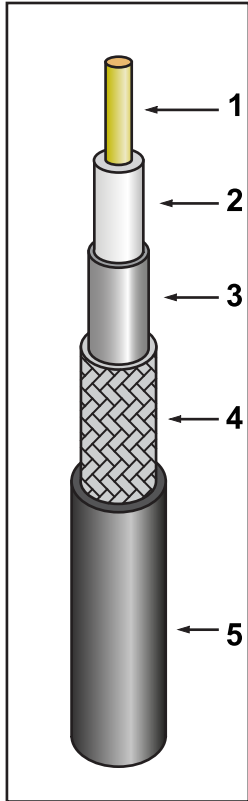

Construction Specifications		
1 Inner Conductor	Solid Bare Copper	0.60 mm
2 Dielectric	FPE insulation	2.80 mm
3 Outer Conductor	Bonded Double AL-Foil	
4 Overall Braid	Tinned Copper	0.12mm
5 Jacket	LSHF	12.75mm

Electrical Specifications	
1 Cable Impedance	75(+/-5) Ω
2 Capacitance (pF/m)	52.5(+/-5)
3 Velocity	83%
4 Rated Voltage (V)	30
5 Rated Temperature ($^{\circ}$ C)	60

Environmental Specifications	
Weight	165Kg/Km



Frequency (MHz)	30	100	135	180	270	360
Attenuation dB/100m	6.53	11.02	12.63	14.50	16.17	17.64

Connectors*				
				
N Type Crimp Plug	TNC Crimp Plug	SMA Crimp Plug	N Type Clamp Plug	N Type Clamp Socket

*Only A Selection of Connectors Shown, More Available From Stock

**We Manufacture Your
Cable Assemblies
To Your Spec**

