


SMA Bulkhead Crimp Socket (50 Ohm) For RD316, RG316DS (8mm Hex. Flange)(Gold plated)

Part number: 311-203

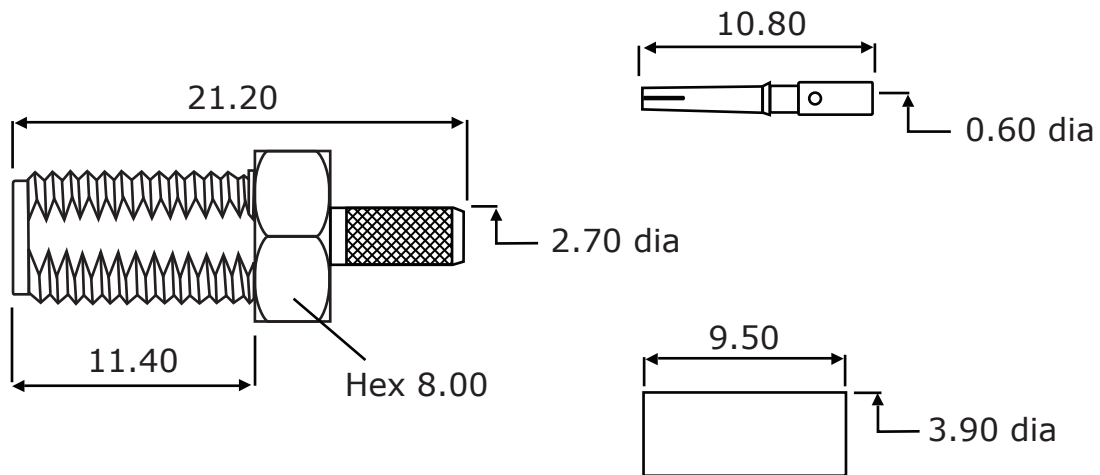

Description	SMA Crimp Bulkhead Jack with 8mm Hex, Gold Plated
To Fit Cable Types	RD316
Fixing Method	Crimp
Body	Brass, Gold Plated
Contact	Beryllium Copper, Gold Plated
Dielectric	PTFE
Ferrule	Brass, Gold Plated
Locknut	Brass, Gold Plated
O Ring	Rubber
Washer	SS41 - Gold Plated
Cable Retention	Equal to breaking strain of cable
Dielectric Withstanding	750 Volts RMS Maximum
Durability	500 mating cycles
Impedance	50 ohms
Max. Frequency	12.4 GHz
Temperature Range	-65 to +165 degrees C
Working Voltage	335 Volts RMS Maximum
Additional Information	Recommended maximum panel thickness = 3.2mm.