


SMA straight crimp plug for RD316

Part number: 311- 404



Description	SMA Crimp Plug, Gold Plated
To Fit Cable Types	RD316
Fixing Method	Crimp
Body	Brass, Gold Plated
Coupling Nut	Brass, Gold Plated
Dielectric	PTFE
Ferrule	Brass, Gold Plated
Pin	Brass, Gold Plated
Cable Retention	Equal to breaking strain of cable
Dielectric Withstanding	750 Volts RMS Maximum
Durability	500 mating cycles
Impedance	50 ohms
Max. Frequency	12.4 GHz
Mating Torque	0.79 to 1.13NM (7-10 inch pounds)
Temperature Range	-65 to +165 degrees C
Working Voltage	335 Volts RMS Maximum

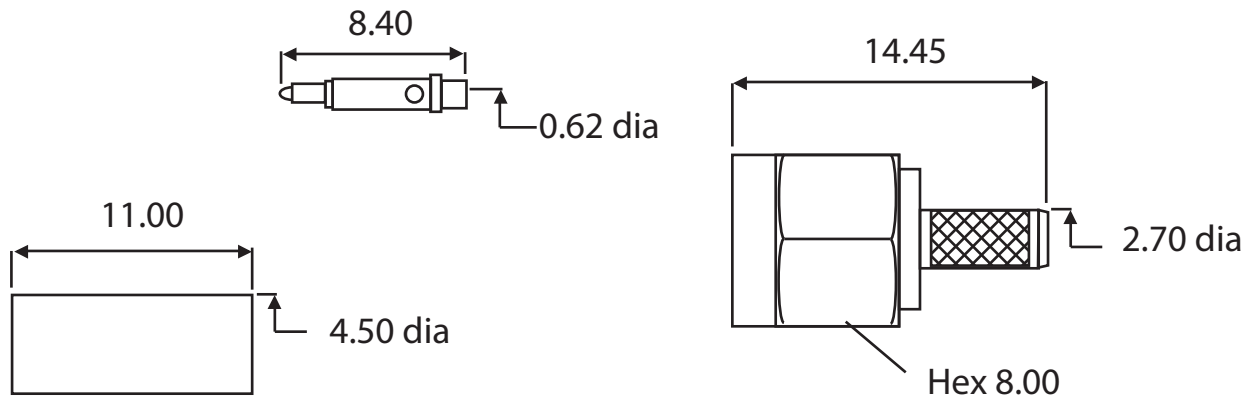