


RG11 Coaxial Cable

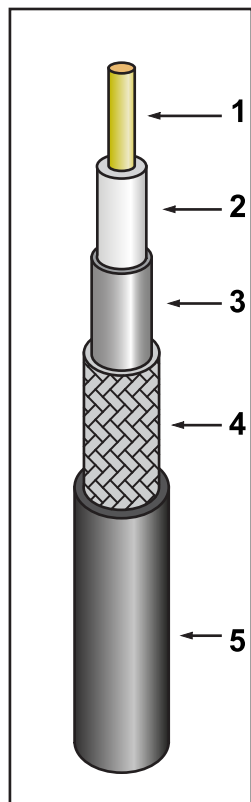

Construction Specifications		
1 Inner Conductor	BCCS - Bare Copper Covered Steel	1.6256mm
2 Dielectric	Foam Polyethylene	7.112mm
3 Overall Braid	AL	60 %
4 Jacket	PVC Jacket	


Electrical Specifications	
1 Impedance	75 Ω
2 Capacitance	53.1522 pF/m
3 Velocity of Propagation	83 %
4 Voltage Withstand	300 V RMS

Environmental Specifications	
1 Bending Radius Static	144.300mm
2 Weight	84 kg/Km



LSZH
Version
Also
Available

Frequency (MHz)	150	220	450	900	1500	1800	2000	2500	3000	5800
Attenuation dB/100m										
Avg. Power kW										

Connectors*				
				
N Type Crimp Plug	TNC Crimp Plug	SMA Crimp Plug	N Type Clamp Plug	N Type Clamp Socket

*Only A Selection of Connectors Shown, More Available From Stock

**We Manufacture Your
Cable Assemblies
To Your Spec**

