


REVISIONS			
DATE	LTR	DESCRIPTION	APVD

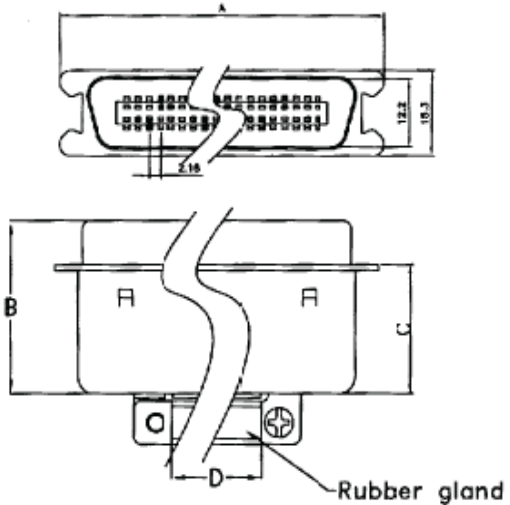

No of Pins	PART NO.	ITEM NO
14	239-1190	G571403S
24	239-1207	G572403S
36	239-1213	G573603S
50	239-1229	G575003S

Insulator:PBT UL94V-0
 Shell:Steel,Nickel over Copper Plated
 Contacts:Brass Alloy Gold Plated on contact
 Tin plated on terminal

HOOD:Steel
 Rating current: 1 AMP
 Contact resistance: <25m Ohm
 Insulation resistance: >1000M ohm at 500V
 Operating Temp: -55°C to +105°C

POSITION	A	B	C	D
14F	37.8	41.0	21.4	7.6
24F	48.6	41.4	21.0	11.3
36F	61.6	42.4	23.0	16.8
50F	76.7	45.0	25.4	19

UNLESS OTHERWISE SPECIFIED		TITLE	
TOLERANCE :		Centronic Solder type Male	
X .1	±0.1	ANGLE :	82°
X .2	±0.1	DRAWN BY <i>Arhua</i>	
X .3	±0.25	DO NOT SCALE DRAWING	
CHECKED BY <i>Arhua</i>	SCALE	UNIT	PART NO. 239-1XXX
APPROVED BY <i>Arhua</i>	1 : 1	THIRD ANGLE PROJECTION	PAGE 1 OF 1
DWG NO. DEWX20C1061901X0	ITEM NO. G57XX03S	DATE 08/16/2001	