

25 Pair Overall Screened Multipair RS232 Cable 24 AWG (Belden 9525 Equiv.)

Part number: 505-028

Description:

24 AWG stranded (7x32) TC conductors, semi-rigid PVC insulation, twisted pairs, overall Beldfoil shield (100% coverage), 24 AWG stranded TC drain wire (continued), PVC jacket.

Conductor

Number of pairs	AWG	Stranding	Conductor material
25	24	7x32	TC- Tinned copper

Insulator


Insulation Material
S-R PVC - Semi-Rigid Polyvinyl Chloride

Outer Shield

Outer Shield Trade Name	Type	Outer shield material	Coverage (%)
Beldfoil® (Z-Fold®)	Tape	Aluminum foil-polyester tape	100

Outer Jacket

Outer Jacket Material
PVC - Polyvinyl Chloride

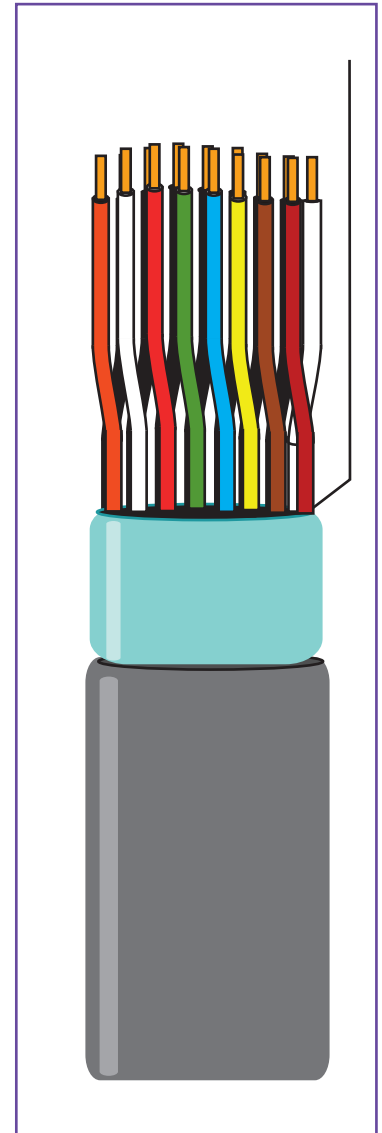

Wire colour: Black & Red, Black & White, Black & Green, Black & Blue, Black & Yellow, Black & Brown, Black & Orange, Red & White, Red & Green, Red & Blue, Red & Yellow, Red & Brown, Red & Orange, Green & White, Green & Blue, Green & Yellow, Green & Brown, Green & Orange, White & Blue, White & Yellow, White & Brown, White & Orange, Blue & Yellow, Blue & Brown, Blue & Orange.

Mechanical Characteristics (Overall)

Operating Temperature Range: -30°C To +80°C
 UL Temperature Rating: 80°C (UL AWM Style 2464)
 Bulk Cable Weight: 221.147 Kg/Km
 Max. Recommended Pulling Tension: 1223.250 N
 Min. Bend Radius/Minor Axis: 132.080 mm
Overall diameter: 12.8mm

Electrical Characteristics

Capacitance (pF/ft): 98.43
Nominal Velocity of Propagation: 60
DCR @ 20°C (Ohm/1000 ft): 78.744
Max. Operating Voltage: 300 V RMS
Max. Recommended Current: 1.1 Amps per conductor @ 25 °C