

2 Pair Overall Screened Multipair RS232 Cable 22 AWG (BeldenEquiv.)

Part number: 506-001

Description:

22 AWG stranded (7x32) TC conductors, semi-rigid PVC insulation, twisted pairs, overall Beldfoil shield(100% coverage), 22 AWG stranded TC drain Wire, PVC jacket.

Conductor

Number of pairs	AWG	Stranding	Conductor material
2	22	7x32	TC- Tinned copper

Insulator


Insulation Material	Wall Thickness (mm)
S-R PVC - Semi-Rigid Polyvinyl Chloride	0.279

Shields

Outer Shield Material	Coverage (%)
Aluminum Foil-Polyester Tape	100

Outer Jacket

Outer Jacket Material	Nom. Wall Thickness (mm)
PVC - Polyvinyl Chloride	0.813

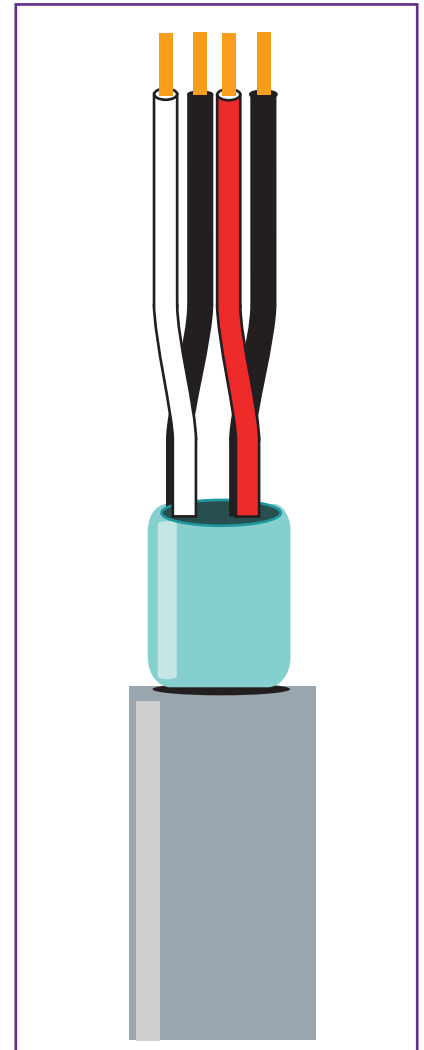

Number	1	2
Colour	Black and Red	Black and White

Mechanical Characteristics (Overall)

Operating Temperature Range: -30°C To +80°C
 UL Temperature Rating: 80°C (UL AWM Style 2464)
 Bulk Cable Weight: 38.Kg/Km
 Max. Recommended Pulling Tension: 97.860 N
 Min. Bend Radius/Minor Axis: 57.150 mm
 Overall Nominal Diameter: 5.8mm

Electrical Characteristics

Capacitance (pF/m): 83.6655
 DCR @ 20°C (Ohm/km): 48.2307
 Max Operating Voltage: 300V RMS
 Max Recommended Current: 2.2 Amps @ 20°C