

3 Pair Overall Screened Multipair RS232 Cable 22 AWG (BeldenEquiv.)

Part number: 506-002

Description:

22 AWG stranded (7x32) TC conductors, semi-rigid PVC insulation, twisted pairs, overall Beldfoil shield(100% coverage), 22 AWG stranded TC drain Wire, PVC jacket.

Conductor

Number of pairs	AWG	Stranding	Conductor material
3	22	7x32	TC- Tinned copper

Insulator


Insulation Material
S-R PVC - Semi-Rigid Polyvinyl Chloride

Shields

Outer Shield Trade Name	Type	Outer shield material	Coverage (%)
Beldfoil®	Tape	Aluminum foil-polyester tape	100

Outer Jacket

Outer Jacket Material	Overall Nominal Diameter
PVC - Polyvinyl Chloride	5.893 mm

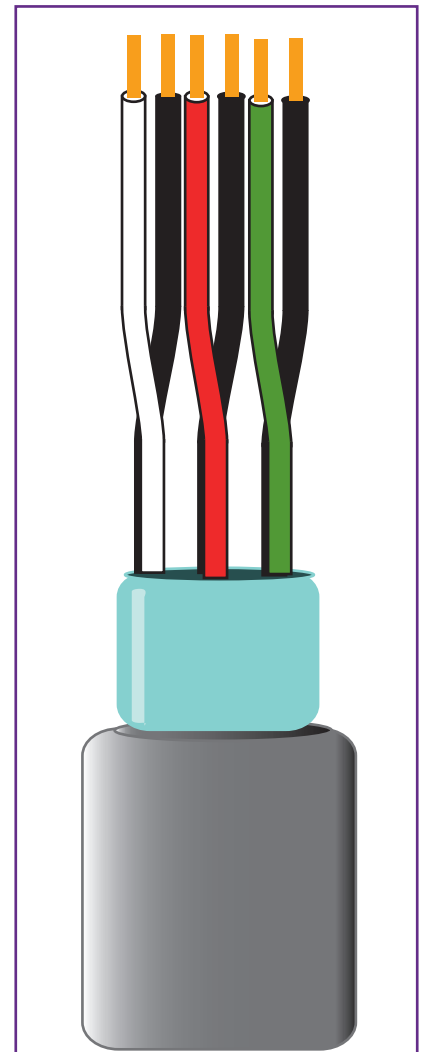

Number	1	2	3
Colour	Black and Red	Black and White	Black and Green

Mechanical Characteristics (Overall)

Operating Temperature Range: -30°C To +80°C
 UL Temperature Rating: 80°C (UL AWM Style 2464)
 Bulk Cable Weight: 40.330 Kg/Km
 Max. Recommended Pulling Tension: 146.791 N
 Min. Bend Radius/Minor Axis: 63.500 mm
 Overall Diameter: 6.1mm

Electrical Characteristics

Impedance (Ohm) : 75
Capacitance (pF/m) : 98.43
Capacitance (pF/m) : 164.05
Nominal Velocity of Propagation: 60
DCR @ 20 °C (Ohm/km): 78.744
Max. Operating Voltage : 300 V RMS
Max. Recommended Current: 1.76 Amps per conductor