

3 Pair Individually Screened Pairs Low Capacitance RS422 Cable 24 AWG (Belden 9730 LSHF Equiv.)

Part number: 512-006

Description:

24 AWG stranded (7x32) tinned copper conductors, Datalene® insulation, twisted pairs, individually Beldfoil® shielded (100% coverage), 24 AWG stranded tinned copper drain wire, PVC jacket.

Conductor

| Number of pairs | AWG | Stranding | Conductor material |
|-----------------|-----|-----------|--------------------|
| 3 | 24 | 7x32 | TC- Tinned copper |

Insulator


| Insulation Material | Wall Thickness (mm) |
|-------------------------|---------------------|
| FPE - Foam Polyethylene | 0.483 |

Inner Shield

| Inner Shield Trade Name | Type | Outer shield material | Coverage (%) |
|-------------------------|------|------------------------------|--------------|
| Beldfoil® (Z-Fold®) | Tape | Aluminum foil-polyester tape | 100 |

Outer Jacket

| Outer Jacket Material | Nom. Wall Thickness (mm) |
|-----------------------|--------------------------|
| LSHF | 1.219 |

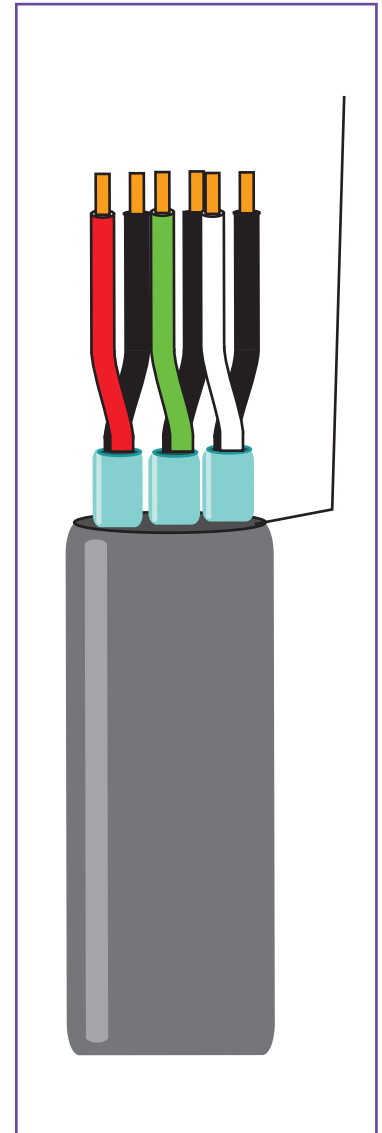

Mechanical Characteristics (Overall)

Operating Temperature Range: -20°C To +80°C
 UL Temperature Rating: 60°C (UL AWM Style 2493)
 Bulk Cable Weight: 62.504 Kg/Km
 Max. Recommended Pulling Tension: 226.858 N
 Min. Bend Radius/Minor Axis: 88.900 mm
 Overall diameter: 6.756 mm

Electrical Characteristics

Impedance (Ohm): 100
 Inductance(μH/m): 0.75463
 Capacitance (pF/ft) : 41.0125
 DCR @ 20°C (Ohm/1000 ft) : 78.744
 Max. Operating Voltage : 300 V RMS
 Max. Recommended Current: 2.5 Amps per conductor @ 25 °C