

4 Pair Individually Screened Pairs Low Capacitance RS422 Cable 24 AWG (Belden 9728 Equiv.)

Part number: 512-007

Description:

24 AWG stranded (7x32) tinned copper conductors, Datalene® insulation, twisted pairs, individually Beldfoil® shielded (100% coverage) each with 24 AWG stranded tinned copper drain wire, overall PVC jacket.

Conductor

Number of pairs	AWG	Stranding	Conductor material
4	24	7x32	TC- Tinned copper

Insulator


Insulation Material	Wall Thickness (mm)
FPE - Foam Polyethylene	0.483

Outer Shield

Outer Shield Trade Name	Type	Outer shield material	Coverage (%)
Beldfoil® (Z-Fold®)	Tape	Aluminum foil-polyester tape	100

Outer Jacket

Outer Jacket Material	Nom. Wall Thickness (mm)
PVC - Polyvinyl Chloride	1.219

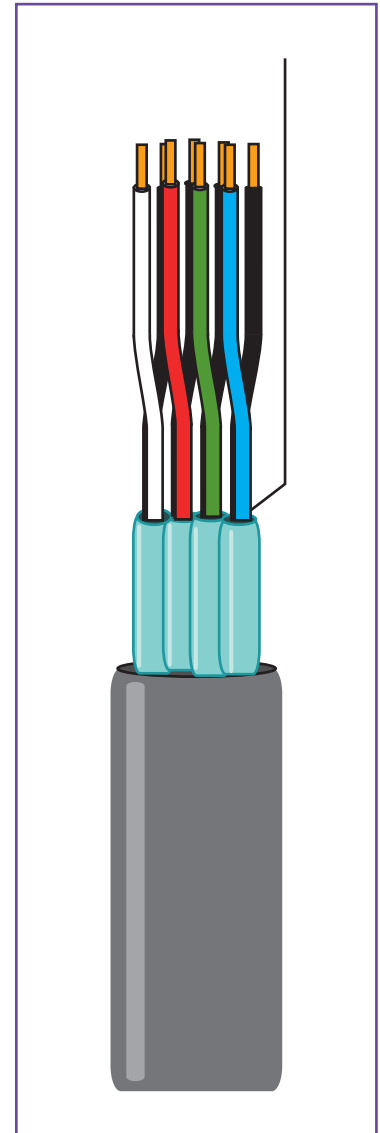

Mechanical Characteristics (Overall)

Operating Temperature Range: -20°C To +80°C
 UL Temperature Rating: 60°C (UL AWM Style 2493)
 Bulk Cable Weight: 75.898 Kg/Km
 Max. Recommended Pulling Tension: 289.133 N
 Min. Bend Radius/Minor Axis: 95.250 mm
 Overall diameter: 9.220 mm

Electrical Characteristics

Impedance(Ohm): 100
Capacitance (pF/ft): 41.0125
Nominal Velocity of Propagation: 76
DCR @ 20°C (Ohm/km) : 78.744
Max. Operating Voltage: 300 V RMS
Max. Recommended Current: 2.5 Amps per conductor @ 25 °C