
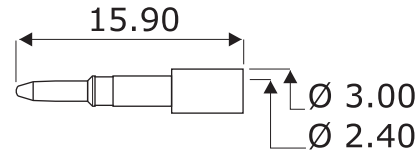


Description

TNC Crimp Plug, RG213

All dimensions in mm.

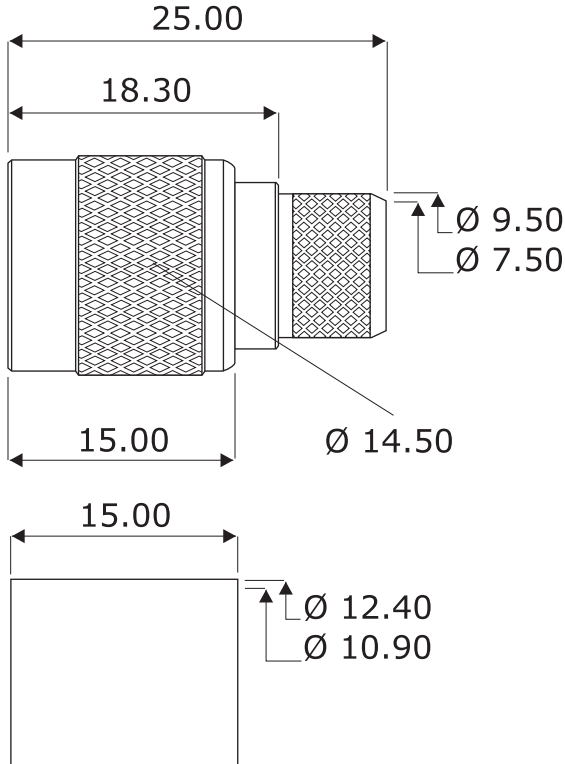

ELECTRICAL

Impedance

50 ohms

Frequency

DC to 3 GHz

Working Voltage

500V RMS Maximum

Dielectric Withstanding Voltage

1500V RMS Maximum

MECHANICAL / ENVIRONMENTAL

Durability

500 mating cycles

Cable Retention

Equal to breaking strain of cable

Temperature Range

-55 to +85 Deg C

MATERIALS

Body

Brass, Nickel Plated

Pin

Brass, Gold Plated

Ferrule

Brass, Nickel Plated

Dielectric

Delrin

Crimp with Hex sizes:

Ferrule: 10.90mm

Contact: 2.54mm



A = 9.00mm

B = 0.00mm

C = 4.00mm