


TNC Plug Crimp Connector

For LMR400, GBC400, Belden 9913, RG8 Cables
314-208

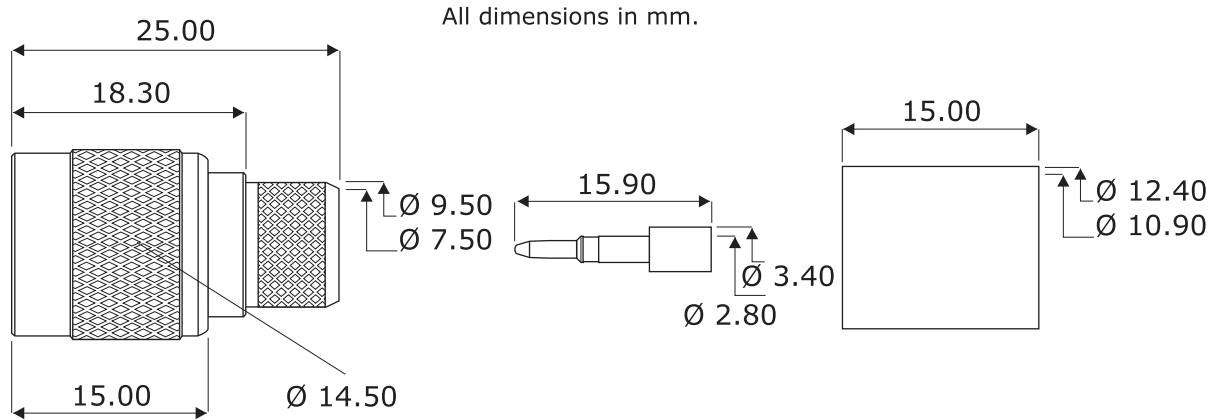

Electrical

Impedance	50 ohms
Interface Frequency	DC to 3 GHz
Working Voltage	500V RMS Maximum
Dielectric Withstanding	1500V RMS Maximum

Durability	500 Mating Cycles
Cable Retention	Typically equal to breaking strain of cable
Temperature Range	-65 to +165 Degrees Centigrade
Crimp Hex Sizes	Ferrule: 10.90mm Hex, Contact: 2.95mm Hex.
Recommended Crimp Tools	CCC2561-1 (T/LMR400)

Body	Brass, Nickel Plated
Pin	Brass, Gold Plated
Ferrule	Brass, Nickel Plated
Dielectric	Delrin

Strip Dimensions	A	B	C
mm	9	0	4

