


ITEM		A.Q.L	Description
Conductor	No./mm	T 0.18 (+/- 0.008)	Stranded Tinned Copper Wire
	T0.18mm x 19		
Insulation	No./mm	2.95 (+/- 0.12)	Solid PE Insulation
	2.95 SPE		
Shield	No./mm	96 (+/-2)	Tinned Copper Wire Braid
	T0.12 x 96	T0.12 (+/- 0.008)	
Jacket	No./mm	4.95	PVC Jacket
	4.95	(+/- 0.20)	

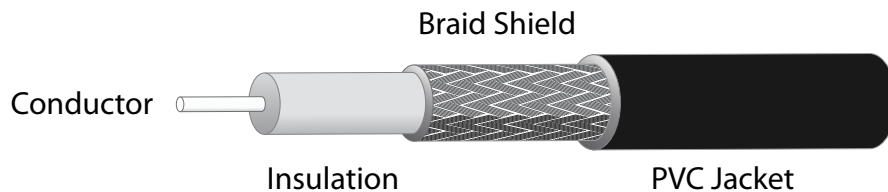

Item	Description	Standards	
1. Cond. Res.	20°C, Inner Conducto Resistance	<41.3 Ω/Km	
2. Braid Coverage		86 ± 2 %	
3. Capacitance		100 ± pF/m	
4. Velocity Ratio		66.6 ± 3 %	
5. Impedance	10 MHz	50 ± 3 Ω	
6. Attenuation	20°C -dB/100M (+/- 15 %)	50 MHz	10.4
		100 MHz	15.0
		200 MHz	21.5
		400 MHz	32.2
		600 MHz	39.5
7. RoHS	With Ref To RoHS Dir 2002/95/EC	PASS	