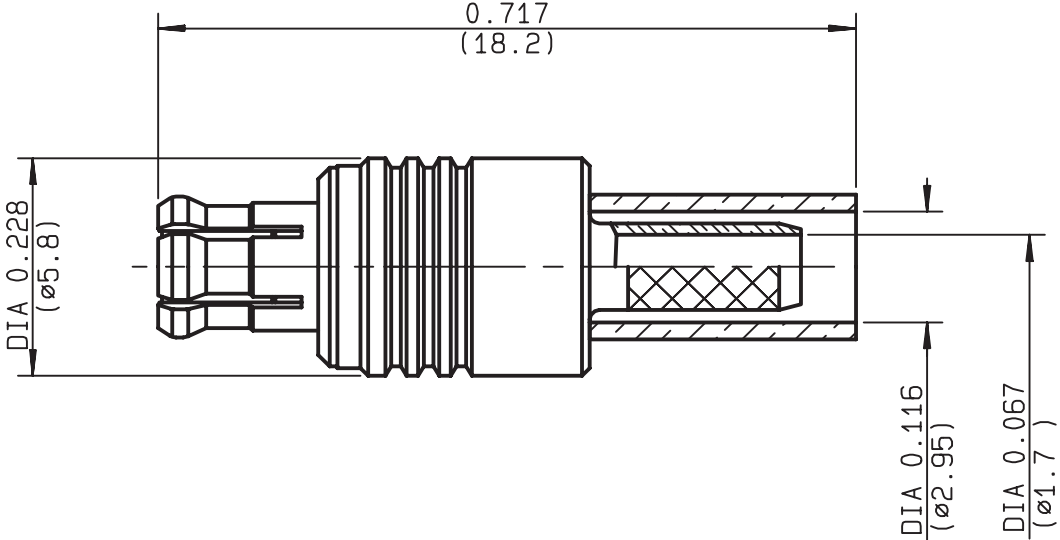


TECHNICAL DATA

<b>STRAIGHT PLUG FULL CRIMP TYPE CABLE 2.6/75 S</b>		<b>SERIES MCX 75</b>	
			
NOMINAL IMPEDANCE	<b>75</b> Ω	CABLES :	<b>RG 179</b> <b>RG 187</b>
FREQUENCY RANGE	<b>0-6</b> GHz		
TEMPERATURE RATING	<b>-55/+155</b> °C		
V.S.W.R	<b>1.05 + .02</b> x F(GHz)Maxi		
RF INSERTION LOSS	<b>0.06</b> √F(GHz) dB Maxi		
VOLTAGE RATING	<b>335</b> Veff Maxi	OTHERS CHARACTERISTICS	
DIELECTRIC WITHSTANDING VOLTAGE	<b>750</b> Veff Mini	CABLE RETENTION	<b>53</b> N Mini
INSULATION RESISTANCE	<b>1000</b> M ΩMini	CENTER CONTACT RETENTION	
HERMETIC SEAL	<b>NA</b> Atm.cm <sup>3</sup> /s	Axial force - mating end	<b>10</b> N Mini
LEAKAGE (pressurized only)	<b>NA</b>	Axial force - opposite end	<b>10</b> N Mini
MECHANICAL DURABILITY	<b>500</b> Cycles	Torque	<b>NA</b> cm.N Mini
WEIGHT	<b>1.4</b> gr	RECOMMENDED TORQUES	
SPECIFICATION		Mating	<b>NA</b> cm.N
		Panel nut	<b>NA</b> cm.N
		Clamp nut	<b>NA</b> cm.N
CONNECTOR PARTS	MATERIALS	FINISH	(all values are given in micrometers)
BODY	BRASS	BBR 2	
OUTER CONTACT	BERYLLIUM COPPER	BBR 2	
CENTER CONTACT	BRASS	GOLD 1.3 OVER NICKEL 2	
INSULATOR	PTFE	-	
GASKET	-	-	
OTHERS PIECES	BRASS	BBR 2	