


## BNC Bulkhead Crimp Socket For RG59 URM70

Part number: 305-223

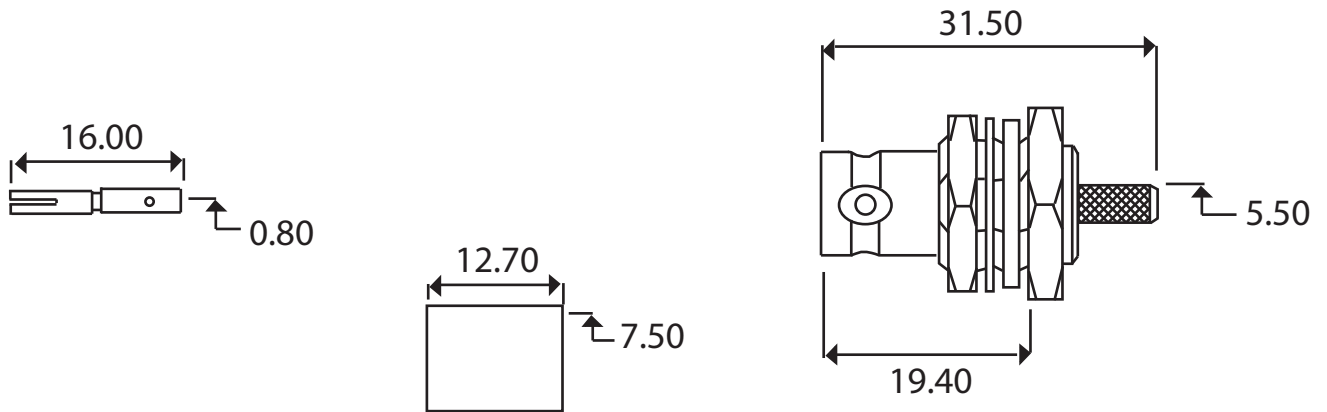

|                                |   |
|--------------------------------|---|
| <b>Description</b>             | <b>BNC Crimp Bulkhead Jack, Hex. Flange</b> |
| <b>To Fit Cable Types</b>      | RG59, URM70                                 |
| <b>Fixing Method</b>           | Crimp                                       |
| <b>Body</b>                    | Brass, Nickel Plated                        |
| <b>Contact</b>                 | Brass, Gold Plated                          |
| <b>Dielectric</b>              | Delrin                                      |
| <b>Ferrule</b>                 | Brass, Nickel Plated                        |
| <b>Grommet</b>                 | Rubber                                      |
| <b>Locknut</b>                 | Brass, Nickel Plated                        |
| <b>Washer</b>                  | Brass, Nickel Plated                        |
| <b>Cable Retention</b>         | Equal to breaking strain of cable           |
| <b>Dielectric Withstanding</b> | 1500 Volts RMS Maximum                      |
| <b>Durability</b>              | 500 mating cycles                           |
| <b>Impedance</b>               | 75 ohms                                     |
| <b>Max. Frequency</b>          | 1 GHz                                       |
| <b>Temperature Range</b>       | -55 to +85 degrees C                        |
| <b>Working Voltage</b>         | 500 Volts RMS Maximum                       |